

Storage A+ Server ASG-1115S-NE3X12R



More details here

Key Applications

Software-defined Storage, In-Memory Computing, Data Intensive HPC, Private & Hybrid Cloud, NVMe Over Fabrics Solution,

Key Features

- Single Socket SP5 AMD EPYC™ 9004 Series processors. Up to 300W TDP.;
- Supports 24 DIMMs with 2DPC, up to 6TB memory capacity with 24 DIMMs of 256GB 3DS RDIMM/RDIMM DDR5 ECC memory;
- Two PCIe 5.0 x16 slots & two AIOM connectors (OCP 3.0 SFF compliant);
- 4x E3.S CXL (16.8mm) + 8x hot-swap E3.S (7.5mm) NVMe drive bays;
- Redundant Titanium 1600W Power Supplies;




Form Factor	1U Rackmount Enclosure: 438.4 x 43.6 x 773.25mm (17.2" x 1.7" x 30.4") Package: 604.774 x 199.898 x 1029.97mm (23.81" x 7.87" x 40.55")
Processor	Single processor(s)
System Memory	Slot Count: Onboard Memory
Drive Bays Configuration	Default: Total 12 bay(s) <ul style="list-style-type: none"> • 8 front hot-swap E3.S 1T PCIe 5.0 x4 NVMe drive bay(s) • 4 front fixed E3.S 2T PCIe 5.0 x8 CXL drive bay(s) M.2: 2 M.2 NVMe slot(s) (M-key 2280/22110)
Expansion Slots	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHHL slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) CXL Support: Up to 2 CXL 1.1 x16 devices M.2: 2 M.2 PCIe 3.0 x2 NVMe slot(s) (M-key 2280/22110)
On-Board Devices	Chipset: AMD System on Chip Network Connectivity: Via AIOM IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s) USB: 2 USB 3.0 port(s) (rear) 2 USB 3.0 port(s) (front) Video: 1 VGA port(s)

(Front View – System)



Drive Bay	Description
1-4	E3 S(2T) NVMe CXL Drive Bays
5-10	Hot-swap E3 S(1T) NVMe Drive Bays

(Rear View – System)

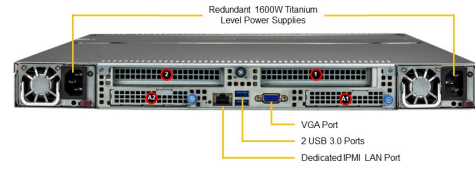

Slot	Slot Description
1-2	PCIe 5.0 x16 FH
3-4	PCIe 5.0 x16 AOM

System Cooling	Fans: 8 Heavy Duty 4cm Fan(s)
Power Supply	1600W Redundant Titanium Level power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; TAS: Supermicro Thin-Agent Service (TAS); SAA(new!); IPMICFG; SMCIPMITool; IPMIView
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 4+1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors Voltage: +1.8V, +12V, +3.3V, +5V, +5V standby, 10 -fan status, 3.3V standby, HT, Memory, VBAT
Dimensions and Weight	Weight: Gross Weight: 68.74 lbs (31.2 kg) Net Weight: 48 lbs (21.8 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-condensing) Non-operating Relative Humidity: 8% to 95% (Non-condensing)
Motherboard	Super H13SSF
Chassis	CSE-126E32-R1K62P